

# COMBITHERM® CTP10-10G

**GAS BOILER-FREE**



**CAPACITY**

- Ten (10) half-size sheet pans; ten (10) full-size or GN 1/1 pans one row deep
- Two (2) side racks with ten (10) non-tilt support rails; 13" (330mm) horizontal width between rails, 2-3/4" (70mm) vertical spacing between rails

**CONSTRUCTION**

- Stainless steel exterior, bright annealed interior
- Seamless welded interior stainless steel cavity
- CoolTouch3™ triple pane window door with hinged inner glass prevents additional heat loss and increases cooking efficiency
- Door is hinged right with a 130° swing
- High efficiency LED lighting integrated in the door

- Door mounted self-draining drip tray
- Hands free positive catch door handle with lighted visual alerts [PATENT PENDING]
- PROrinse™ ergonomic retractable hand shower includes a safety shutoff interlock that shuts off water to the hose [PATENT PENDING] and a built-in backflow preventer in the hand shower handle
- SafeVent™ provides automatic steam venting at the end of the cooking cycle [PATENT #7,282,674]
- Zero Clearance design maximizes floor space utilization with features that carefully protect temperature sensitive components and controls [PATENT PENDING]
- Adjustable stainless steel legs provide stability
- High efficiency modulating gas burner maximizes the residence time of flue gases [PATENT PENDING]

**CT PROFORMANCE™ STANDARD FEATURES**

- Oven with state-of-the-art innovative solutions that meld together perfectly to deliver the highest performance standards, consistent food quality, and production efficiency.
- PROtouch™ control provides a simple and intuitive touch screen interface, large screen display and icons that are easy to use and identify.
- Software operation in English, French, German, Korean, Mandarin, Russian, or Spanish.
- Four cooking modes:  
Steam - 85°F to 250°F (30°C to 120°C)  
Convection - 85°F to 575°F (30°C to 300°C)  
Combination - 85°F to 575°F (30°C to 301°C)  
Retherm - 245°F to 320°F (120°C to 160°C)
- Cook time is displayed in hours : minutes : seconds for greater precision.

- Access an unlimited number of programmed titled recipes that you've customized, marked as favorites, or placed into category folders.
- Removable, single-point, quick-connect, core temperature product probe.
- Two power levels: reduced power to manage kitchen power peaks, and eco power for optimal oven efficiency.
- Absolute Humidity Control™ (AHC) provides 0 - 100% humidity levels allowing more control over the ideal cooking environment and product finish [PATENT PENDING].
- Auto-reversing fan with five different fan speeds expands cooking capabilities - from braising, roasting, to slow sensitive products such as soufflés and meringues, or any product affected by a high velocity of air movement.
- Moisture injection feature provides perfect sheen and crust on breads and pastry items.
- Auto-detect USB for HACCP data access, Recipe Management, and software updates.

- Multi-shelf timers can be labeled by product name and programmed in hours, minutes and seconds giving greater control for delicate items.
- Sleep mode can be used to save valuable time by eliminating the need to power down and restart.
- Low temperature Delta-T feature for lower temperature cooking or longer term roasting.
- Programmable cool down feature provides the operator with the ability to lower the temperature of the oven compartment at an accelerated pace.
- Dehydration auxiliary function.
- CombiClean PLUS™ fully automated cleaning with 5 cleaning levels.
- Odometer tracking and audit trail provides extensive diagnostic and troubleshooting features.

**SHORT FORM SPEC**

Provide Alto-Shaam CombiTherm® CT PROformance counter-top model CTP10-10G boiler-free gas CombiOven designed with EcoSmart® technology for reduced energy and water consumption. Includes operational modes for steam, convection, a combination of steam and convection heat, and retherm. Oven is to be constructed of 18 gauge stainless steel interior cavity. Oven includes an attached retractable hand shower spray hose with safety shutoff interlock system and a backflow preventer. PROtouch™ control features

includes a cool-down function, automatic cleaning function, recipe programming, three power levels, ten (10) humidity levels, auto-reversing fan with five (5) fan speeds, multi-shelf timers, and sleep mode. Oven includes USB port, HACCP data access, and four (4) adjustable stainless steel legs. Each oven is to accommodate up to ten (10) half-size sheet pans or ten (10) full-size hotel pans (GN 1/1), include standard right-hand door hinging, ten (10) non-tilt support rails, and five (5) stainless steel shelves.

**FACTORY INSTALLED OPTIONS**

**Electrical Choices**

- 120V 1ph       208-240V 1ph
- 208-240V 3ph     380-415V 3ph

**Cord and Plug**

- NEMA 5-20P, 20A, 125V Plug  
(no-cost option for 120V models)

**Gas Type**

- Natural       Propane

**Door Swing**

- Right-hand Door Hinging, standard
- Recessed Door, optional; increases oven width by 4" (102mm)

Extended One-year Warranty

Alternate Burner Orifice – specify elevation for elevations higher than 2,000 feet (610m) above sea level

Automatic Grease Collection System [PATENT PENDING], includes four (4) 6-piece, self-trussing poultry racks #5014438, interior drip collection pan, and grease collection container with shut off valve (not available on units with smoking feature)

**Cleaning system choices**

- Automatic tablet-based cleaning system, standard
- Automatic liquid cleaning system pumps through the system for a deep cleaning, hands free process, includes one (1) removable support tray for liquid cleaner container, optional

CombiLatch™ door interlock with adjustable timer safeguards operators from heat and steam in the oven cavity when opening the door during a cooking cycle

Installation Start-Up Check - AVAILABLE THROUGH AN ALTO-SHAAM FASTEAM CENTER

Smoking Feature - including one-step cold smoking (NOT AVAILABLE ON UNITS WITH SECURITY DEVICES)

**Probe Choices**


- Removable, single-point, quick-connect core temperature probe, standard
- Removable, single-point, quick-connect sous vide temperature probe, optional
- Hard-wired, multi-point core temperature probe, optional

**Security Devices for correctional facility use**

- Optional base package: includes tamper-proof screw package, excludes temperature probe
- Anti entrapment device, optional
- Control panel security cover, optional
- Hasp door lock (padlock not included), optional
- Removable, single-point, quick-connect core temperature probe, optional
- Seismic feet package, optional

Stacking Hardware



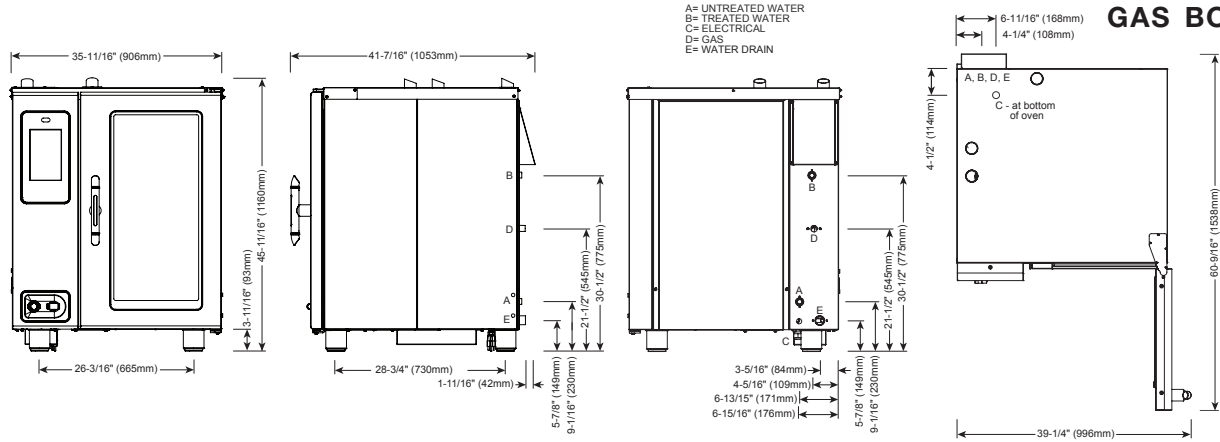

**DIMENSIONS: H x W x D**

**EXTERIOR:**

45-11/16" x 35-11/16" x 41-7/16" (1160mm x 906mm x 1053mm)

**EXTERIOR WITH RECESSED DOOR:**

45-11/16" x 39-11/16" x 41-7/16" (1160mm x 1008mm x 1053mm)

**INTERIOR:**

31-1/2" x 16-1/4" x 28-1/16" (800mm x 411mm x 712mm)



**WATER REQUIREMENTS**

**TWO (2) COLD WATER INLETS - DRINKING QUALITY**

**ONE (1) TREATED WATER INLET:** 3/4" NPT\* \* Can manifold off of one  
**ONE (1) UNTREATED WATER INLET:** 3/4" NPT\* 3/4" line.

**LINE PRESSURE:** 30 to 90 psi 2.1 to 6.3 bar

**WATER DRAIN:** 1-1/2" (40mm) CONNECTION WITH A 2" (51mm) MINIMUM AIR GAP INSTALLED AS CLOSE TO THE OVEN AS POSSIBLE. MATERIALS MUST WITHSTAND TEMPERATURES UP TO 200°F (93°C).

**CLEARANCE REQUIREMENTS**

**LEFT:** 0" (0mm) 18" (457mm) FOR SERVICE ACCESS

**RIGHT:** 0" (0mm) NON-COMBUSTIBLE SURFACES 2" (51mm) DOOR SWING OR COMBUSTIBLE SURFACES

**TOP:** 20" (508mm) FOR AIR MOVEMENT

**BACK:** 4" (102mm) **BOTTOM:** 5-1/8" (130mm) FOR LEGS, AIR INTAKE

**INSTALLATION REQUIREMENTS**

- Oven must be installed level.
- Hood installation is required.
- Water supply shut-off valve and back-flow preventer when required by local code.

**GAS REQUIREMENTS (GAS TYPE MUST BE SPECIFIED ON ORDER)**

HOOK-UP: 3/4" NPT

**RATED THERMAL LOAD**

**CONNECTED PRESSURE**

NORTH AMERICA		INTERNATIONAL		NORTH AMERICA		INTERNATIONAL	
Natural Gas/Propane		G20, G25, G31		Natural Gas	Propane	G20	20mbar
Gross Heating Value (HHV)		Net Heating Value (LHV)		Minimum: 5.5" W.C.	Minimum: 9" W.C.	G25	20mbar
80,000 Btu / hr		21.0 kW		Maximum: 14" W.C.	Maximum: 14" W.C.	G31	30mbar

**ELECTRICAL - CTP10-10G (DEDICATED CIRCUIT REQUIRED) DO NOT CONNECT TO A G.F.I. OUTLET**

**WITH COMBISMOKER® OPTION**

	VOLTAGE	PH	HZ	AWG	CONNECTION no cord, no plug	AMPS	BREAKER	kW	CONNECTION no cord, no plug	AMPS	BREAKER	kW
↻	120	1	60	14	L1, N, G	6.8	20	.84	L1, N, G	12.0	20	1.46
↻	208 - 240	1*	50/60	14	L1, L2/N, G	4.8 - 4.2	15	1.0	L1, L2/N, G	7.3 - 7.1	15	1.5 - 1.7
↻	208 - 240	3	50/60	14	L1, L2, L3, G	4.8 - 4.2	15	1.0	L1, L2, L3, G	7.3 - 7.1	15	1.5 - 1.7
↻	380 - 415	3	50	14	L1, L2, L3, N, G	4.6 - 4.2	15	1.0	L1, L2, L3, N, G	7.2 - 7.1	15	1.6 - 1.7

↻ NORTH AMERICA VOLTAGE CHOICE

↻ INTERNATIONAL VOLTAGE CHOICE

\*ELECTRICAL SERVICE CHARGE APPLIES

WEIGHT	SHIP DIMENSIONS	PAN CAPACITY	
NET 625 lbs est 283 kg	(L x W x H) 56" x 45" x 65"*	FULL-SIZE: 20" x 12" x 2-1/2"	Ten (10)
SHIP 675 lbs* 306 kg*	(1422 x 1143 x 1651mm)*	GN 1/1: 530 x 325 x 65mm	Ten (10)
		*HALF-SIZE SHEET: 18" x 13" x 1"	Ten (10)
		*ON WIRE SHELVES ONLY	
		PRODUCT MAXIMUM: 120 lb (54 kg)	
		VOLUME MAXIMUM: 75 quarts (95 liters)	
		*ADDITIONAL WIRE SHELVES REQUIRED FOR MAXIMUM CAPACITY	

\*DOMESTIC GROUND SHIPPING INFORMATION. CONTACT FACTORY FOR EXPORT WEIGHT AND DIMENSIONS.